

OPTIMAL CONDITIONS OF DYE REMOVAL FROM TEXTILE DYEING INDUSTRIAL WASTEWATER BY ADSORPTION PROCESS

Nutthakan Songkampol and Jaruwan Wongthanate*

Abstract

The study was focused on optimal condition (pH, dosage and contact time), kinetic, and adsorption isotherm of dye removal from textile dyeing industrial wastewater by rice husk and water hyacinth as adsorbents. The results revealed that the maximum dye removals in both of rice husk and water hyacinth were occurred at initial pH 2.0 with the percentages of 95% and 93%, respectively. Optimal dosages of rice husk (50 g/L) and water hyacinth (10 g/L) were suitable contact time interval for adsorption equilibrium at 360 min. The kinetics followed a pseudo second-order. Correlation coefficient (R^2) of rice husk adsorbent used in both Langmuir's equation isotherm and Freundlich's equation isotherm (0.9946, 0.9445) were higher than R^2 of water hyacinth adsorbent (0.8043, 0.8109). Rice husk was the best adsorbent followed Langmuir's equation isotherm and adsorption mechanism was a chemisorption. Moreover, the characteristics of textile dyeing industrial wastewater using rice husk adsorbent were decreased from 178 to 85 mg/L (TSS), 1,883 to 1,430 mg/L (TDS), 95 to 48 mg/L (BOD) and 445 to 292 mg/L (COD), respectively. Hence, rice husk and water hyacinth could be applied for dye removal in wastewater treatment.

Keywords: Adsorption, Dye removal, Industrial wastewater, Rice husk, Water hyacinth (*Eichhornia crassipes* (C.Mart) Solms)

Faculty of Environment and Resource Studies, Mahidol University, 999 Phutthamonthon 4 Road, Salaya, Phutthamonthon, Nakhon Pathom, Thailand.

* Corresponding author, E-mail: jaruwan.won@mahidol.ac.th Received 22 May 2017, Accepted 28 August 2017

1. Introduction

Textile dyeing industry is one of the industries that consume a lot of water and chemical substances, which cause a number of problems to the society. One of the main problems caused the water pollution, which was reported that it was from the drainage. The discharged wastewater was composed of color, biochemical oxygen demand (BOD), chemical oxygen demand (COD), pH, suspended solid (SS), heat and others. Moreover, the artificial coloring provided for the procedure also affects the natural resources or the water resources [1]. Reactive dyes are widely used in dyeing processes for coloring yarn or fabric due to their high reactivity and good color resilience. Even though there are a number of different dyes, it seems that the reactive dye causes far more problems than other types [2]. They contain the chromophoric groups and reactive groups that come from covalent bonds of fibers. Substance named azo is let into the environment somehow from the textile dyeing industry and it has a huge effect on the environment. Besides limitations previously discussed, the regeneration of activated carbon, such as the high expense of regeneration and loss of carbon in the process, led to problem that could be a carcinogen [3]. For previous researches, there were various manners involving with the solutions of color problems in the wastewater. The method was called as adsorption that was widely used in many

companies with the purpose of removing the color from the wastewater [4]. Other researches were reported that synthetic adsorbents such as activated carbon or known as the porous material had the ability to absorb various organic compounds in the fluid or gas due to the micro porosity and its high efficiency [5]. Moreover, activated carbon was the one of the excellent materials, however; it was the higher expenses as well. Also, after the treatment was finished, the ability of further procedure was denied. The waste materials (natural sorbents) such as rice husk and water hyacinth (*Eichhornia crassipe* (C.Mart) Solms) as adsorption media were applied for dye removal [6-7]. After the existing problems in textile dyeing industry were toward the society in Thailand, they necessarily happened to investigate the procedure to remove the mix color for specific reaction dye (reactive blue 19 and reactive blue 160). Hence, this study was focused on the feasibility of waste materials; rice husk and water hyacinth (*Eichhornia crassipe* (C.Mart) Solms) as adsorption media for dye removal from textile dyeing industrial wastewater. The optimal conditions for adsorption capacity of waste materials; initial pH (2.0-10.0), dosage (1-50 g/L) and contact time (30-1,440 min) were investigated. Kinetic, adsorption isotherm and the efficiency of color removal from textile dyeing industrial wastewater were also carried out.

2. Materials and methods

2.1 Preparation of adsorbents and synthetic wastewater

The natural sorbents of rice husk (RH) and water hyacinth (WH) were washed cleanly by a distilled water, cut in the small pieces and dried with a hot air oven at 80°C for 2 h. Then, they were screened with a sieve (600 µm) and were kept in a desiccator before using as sorbents.

The adsorbents were analyzed surface area, pore diameter, and pore volume by the Brunauer Emmett and Teller (BET) method [8] using BELSORP – mini, BEL, Japan. The averages of specific surface area, pore diameter, and pore volume of rice husk were 86.84 m²/g, 3.35 nm, and 19.95 cm³/g, respectively. While, that's of water hyacinth were 0.059 m²/g, 190.12 nm, and 0.013 cm³/g, respectively. It was apparent that the specific surface area of rice husk adsorbent was the larger and its pore size was smaller than water hyacinth.

Synthetic wastewater of mix reactive dye solution concentration at 1,000 mg/L were prepared by dissolving 0.5 g reactive blue 19 (C₂₂H₁₆N₂S₃O₁₁·2Na) with 0.5 g reactive dye 160 (C₃₈H₂₃Cl₂N₄O₁₈S₅·5Na) in 1 L of distilled water. Synthetic wastewater was prepared the concentration at 100 mg/L in all experiments. The concentrations of synthetic wastewater before and after the adsorption process were checked by a UV – Visible Spectrophotometer at wavelength 614 nm.

2.2 Experimental setup

The experiments were carried out in the batch test. Waste materials of rice husk and water hyacinth (*Eichhornia crassipe* (C.Mart) Solms) were applied for natural adsorbents in adsorption process of experiment. The synthetic wastewater at concentration 100 mg/L (100 mL) was agitated with 10 g/L of adsorbents, and was set in the range of initial pH from 2.0 to 10.0 with 0.1 N NaOH or 0.1 N HCl. The optimal dosages of adsorbents were varied weight (1, 5, 10, and 50 g/L) and were fixed with the optimum of initial pH. After that, the experiment was operated into the different contact times of 30, 60, 90, 120, 150, 240, 300, 360, 420, 480, 540, 720 and 1,440 min [9-10] with the optimum of initial pH and dosages of adsorbents. All batch tests were put into a shaker (200 rpm) for 24 h. and were performed in the triplicates. After the experiments have been completely finished, the liquid samples were collected and filtered to measure the absorbance of dye by a UV – Visible Spectrophotometer at wavelength 614 nm as well as were analyzed the final concentration of wastewater.

For an efficiency of dye removal from textile dyeing industrial wastewater, textile dyeing industrial effluent was obtained from the equalization tank (Wastewater from dyeing plant) of a textile industry at Nakhonpathom, Thailand. Effluent was collected by a grab sample and the physical and chemical characteristics were of pH (9.2), color (93 IAU), TSS (178 mg/L), TDS (1883 mg/L), BOD (95 mg/L), and

COD (445 mg/L) [11]. Moreover, analysis of initial dye concentration of effluent was determined by a UV – Visible Spectrophotometer. The best adsorbent (rice husk) was added 100 mL of effluent into flask (250 mL) at optimal conditions of initial pH (pH 2.0) and dosage (50 g/L) and then was put into the shaker at 200 rpm for a contact time equal to equilibrium (360 min) of adsorption. After water sample and adsorbent apart were filtrated and separated, measurement of absorbance was determined the final concentration for pH values and physical and chemical analysis of effluent.

2.3 Analytical method and data analysis

The efficiencies of color removal by rice husk and water hyacinth were expressed in the concentration of color (mg/L). The removal efficiency was calculated according to Equation (1) [12]:

$$\text{Removal efficiency (\%)} = [(C_0 - C_e) / C_0] * 100 \quad (1)$$

When, C_0 = Initial concentration (mg/L), C_e = Final concentration (mg/L)

The amount adsorbed (q_e) were calculated according to the Equation (2) [13]:

$$\text{The amount adsorbed } (q_e) \text{ (mg/g)} = (C_0 - C_e) V / m \quad (2)$$

When, V = Volume of solution (L), m = Weight of adsorbent (g).

The adsorption kinetics was investigated by examining the influence of contact time on dye removal according to them, the period time required for the maximum of dye removal. Their kinetics were analyzed by the pseudo first-order and pseudo second-order equations to model.

The linear pseudo first-order equation of Lagergren is expressed as Equation (3) [14-15]:

$$\log(q_e - q_t) = \log q_e - (K_1 / 2.303)t \quad (3)$$

Where q_e and q_t are the amount of dye adsorbed onto the adsorbent (mg/g) at equilibrium and at t , respectively. K_1 is the rate constant of first-order adsorption (min^{-1}) was obtained from linear slope and q_e (cal) was obtained from intercept.

By contrast, the pseudo second-order kinetic model is based on the experimental data of solid phase adsorption [16]. The linear pseudo second-order equation is expressed as Equation (4) [16]:

$$t/q_t = (1/K_2 q_e^2) + (t/q_e) \quad (4)$$

Where, K_2 is the rate constant of second-order adsorption ($\text{g mg}^{-1} \text{min}^{-1}$). It was obtained from intercept. q_e (cal) was obtained from a linear slope.

In the present study isotherm models, namely, Langmuir and Freundlich were fitted with the experimental equilibrium data for adsorption. These

isotherm models in linear form are represented by the Equation (5) and (7) [17-19].

Langmuir adsorption isotherm model:

$$q = q_m bC / (1 + bC) \quad (5)$$

When, q is x/m , the amount of dye adsorbed on adsorbent (mg/g) at equilibrium, C is the equilibrium concentration of solute (mg/L), q_m is monolayer adsorption capacity (mg/g), and b is adsorption equilibrium constant (L/mg) [20-24].

For the isotherm, it was showed that absorbing the experimental results were good or bad. It was also used for the calculation of the constant isotherm of Langmuir and showed in a fixed value of the separation R_L (Dimensionless Constant Separation Factor). R_L value ($0 < R_L < 1$) indicates the vacuum. Linear can be obtained from the relationship of Equation (6) [20-24].

$$R_L = 1 / (1 + bC_0) \quad (6)$$

When, b = Adsorption coefficient, C_0 = Initial concentration (mg/L)

Freundlich adsorption isotherm model:

$$q = KC^{1/n} \quad (7)$$

When, q is x/m , the amount of dye adsorbed on adsorbent (mg/g) at equilibrium, C is the equilibrium

concentration of solute (mg/L), K is related to adsorption capacity, and n is the measure of adsorption intensity or surface heterogeneity. The value of n ranges between 0 and 1, the adsorption becomes more heterogeneous as its value gets closer to zero [20-24].

3. Results and discussion

3.1 Optimal conditions of initial pH, dosage and contact time to equilibrium of adsorbent for dye removal

The results showed that initial pH significantly affected dye removal ($p < 0.05$) (Fig. 1). The percentage removals of all sorbents were increased at the lower pH and declined at the higher pH. Two types of adsorbents were recorded the maximum uptakes of dye at initial pH 2.0 by rice husk (RH) (95%) and water hyacinth (WH) (93%) (Fig. 1(a)), which were consistent with the amount of dye adsorb at 9 and 9 mg/g, respectively (Fig. 1(b)). It indicated that the amount of dye uptake decreased suddenly with an increase in the pH of the solutions similar to previous reports. The maximum adsorption was recorded for pH value in the range of 1.5 – 2.0 [25]. The experiments were also performed at pH 2.0 to avoid disruption of the fiber structure of the adsorbents [26-27]. As the pH value decreased, it was possible for the adsorbent surface to become positively charged, thereby allowing electrostatic attraction forced to enhance the dye anions, which were negatively charged. Thus, the increasing quantity of dye was adsorbed and also

raised the dye removal percentage. When the pH values were raised, however, the surface may become negatively charged. These results were in hydroxide

(OH) ions competing with dye anions and caused the quantity of dye adsorbed or the percentage removal of dye to drop [5].

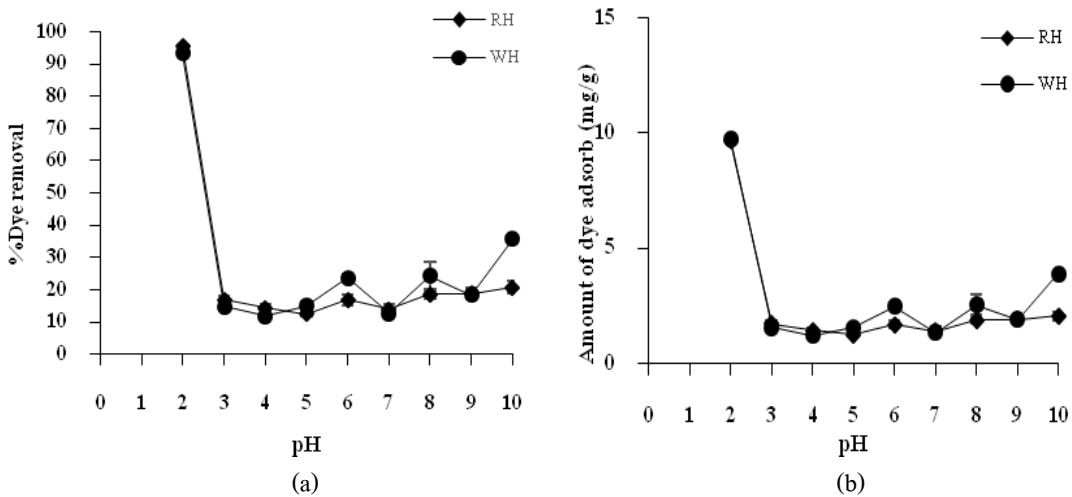


Fig. 1. Effect of initial pH for dye removal; (a) Percentage of dye removal and (b) Amount of dye adsorbed

The adsorbent dosages were significant ($p < 0.05$) for dye removal (Fig. 2). For quantitative removal of dye, a minimum RH dosage of 50 g/L, whereas WH dosage was at least 10 g/L were required. Similar results were reported with optimal adsorbent dosage at 1.0 g/100 mL [6]. For the higher values of sorbent dosage, the removal of dye remained almost constant or decreased slightly. An increase in adsorbent dosage was resulted in the higher percentage removal of dye. It was due to the available surface area of the adsorbent increased and more potential sites existed to facilitate bio-sorption [28]. The percentages of dye removal increased from 38% to 97% for RH and 35% to 85%

for WH (Fig. 2. (a)). On the other hand, the amounts of dye adsorbed were decreased from 38 to 1 mg/g for RH and 36 to 1 mg/g for WH (Fig. 2 (b)).

These results were consistent with previous study. The fall in the quantity of adsorbed dye when the adsorbent mass increased was attributed to the split in the flux, or to the concentration gradient measuring the relationship between the concentration of the solute in the solution and the concentration of the solute at the adsorbent surface. When the adsorbent mass increased, the quantity of dye adsorbed per unit weight of adsorbent decreased. Thus, the dye adsorbed value was lowered by raising the adsorbent dosage [5].

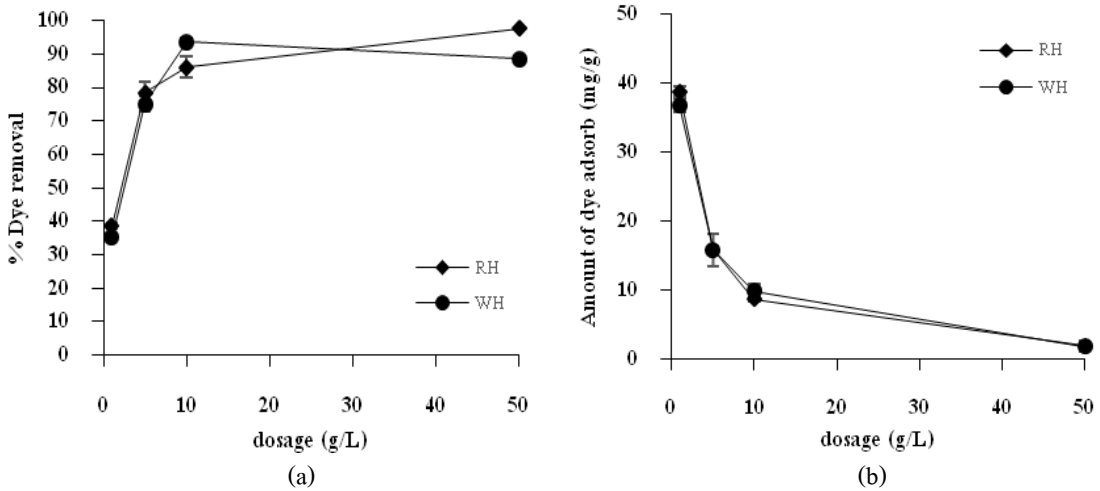


Fig. 2. Effect of optimal dosage for dye removal; (a) Percentage of dye removal and (b) Amount of dye adsorbed

The effect of contact time was investigated at 100 mL of synthetic wastewater at concentration 100 mg/L. The adsorbent dosages were fixed in 50 g/L of RH and 10 g/L of WH. They were carried out at the optimum of initial pH 2.0 and put into the shaker (200 rpm) for different contact times. Results showed that adsorption was very fast at the beginning, whereas the time was required to reach equilibrium increased with the significant ($p < 0.05$) [29]. Also, the contact time period of 360 min was suitable time interval for adsorption equilibrium. The percentage of dye removal increased with contact time for all sorbents. Furthermore, after a contact time of 360 min, the curves exhibited a flat plateau. The adsorption yields of sorbents for dye removal were 97% (RH) and 96% (WH) (Fig. 3 (a)), and the amounts of dye adsorbed were 2 and 10 mg/g for RH and WH, respectively (Fig. 3 (b)).

3.2 Kinetic adsorption of dye removal

The adsorption kinetics was investigated by examining the influence of contact time on dye removal. The applicability of pseudo first-order and pseudo second-order kinetic models was determined by measuring the coefficients of determination (R^2). High values of R^2 indicated that the model was appropriate for the data [25]. The results of the kinetic parameters are displayed in Table 1.

The R^2 values of pseudo first order kinetic were relatively low. The calculated q_e values were obtained from these models and failed to match the q_e (exp). The first-order kinetic model did not match well with the whole range of contact times. However, this model could be used for the preparatory stage of the mechanism of adsorption [31].

The high correlation coefficients obtained for the pseudo second-order kinetic model were predicted that

dye adsorptions of both rice husk (0.9999) and water hyacinth (0.9998) were fitted to this model and the rate-limiting step may be chemical adsorption involving valence forces through sharing of electrons

between adsorbent and adsorbate, or covalent forces [30, 32-35]. The kinetics of dye adsorption onto the adsorbents could be explained by a pseudo second-order kinetic equation.

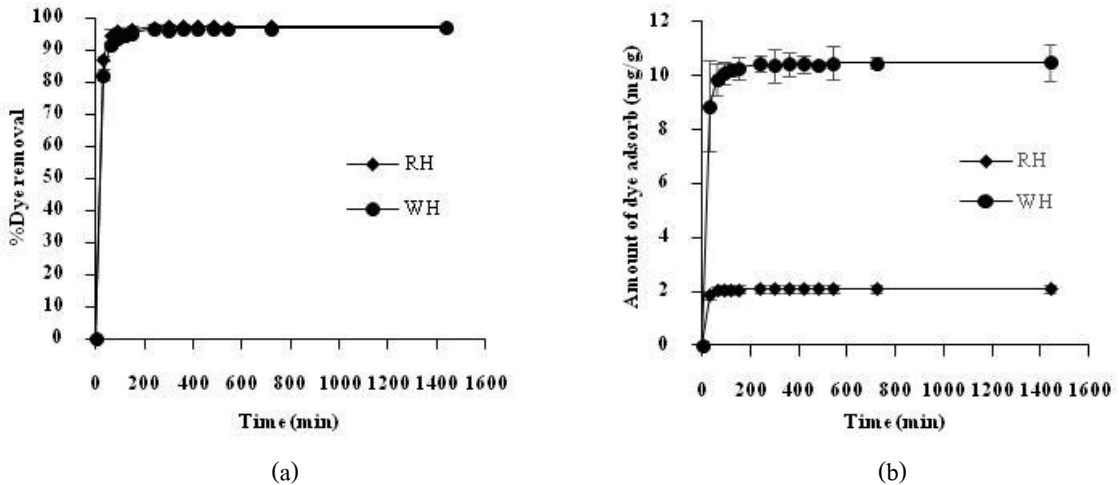


Fig. 3. Effect of contact time to equilibrium; (a) Percentage of dye removal and (b) Amount of dye adsorbed.

3.3 Adsorption isotherm for dye removal

Regarding to Table 2, the dosage of RH and WH were used at various weights (0.1, 0.5, 1, 5 g) under the optimal conditions of initial pH 2.0, initial concentration 100 mg/L, contact time 360 min and agitated on shaker at 200 rpm.

The correlation coefficients (R^2) of rice husk adsorbent for both the Langmuir (0.9946) and the

Freundlich equation isotherms (0.9445) were higher than that of water hyacinth adsorbent (i.e. 0.8043 and 0.8109). The adsorption capacity (q_m) of rice husk was 0.418 mg/g, while that’s of water hyacinth was 0.3623. As well as the R_L value of rice husk (0.3131) was higher than the R_L value of water hyacinth (0.1943). It was indicated that rice husk adsorbent had a high capacity for dye adsorption in solution.

Table 1 Kinetic parameters of dye adsorption onto the rice husk and water hyacinth

Adsorbents	q_c (exp)	Pseudo first order kinetic			Pseudo second order kinetic		
		q_c (cal)	K_1 (min^{-1})	R^2	q_c (cal)	K_2 ($g\ mg^{-1}\ min^{-1}$)	R^2
Rice husk	2.1048	0.4104	0.0068	0.8592	2.1133	0.3012	0.9999
Water hyacinth	10.4352	0.3394	0.0063	0.7848	10.4932	1.0265	0.9998

Table 2 Adsorption isotherms data of rice husk and water hyacinth

Types of adsorbent	Langmuir's equation isotherm				Freundlich's equation Isotherm		
	R^2	q_m (mg/g)	b	R_L	R^2	K	n
RH	0.9946	0.418	0.0215	0.3131	0.9445	8.73×10^{-3}	1.1143
WH	0.8043	0.3623	0.0393	0.1943	0.8109	1.78×10^{-2}	1.3963

Table 3 The efficiency of dye removal from synthetic wastewater and textile dyeing wastewater

Type of adsorbents	Initial dye concentration (mg/L)	Final dye concentration (mg/L)	% Dye removal	Initial color intensity (IAU)	Final color intensity (IAU)	% Color intensity removal
Synthetic wastewater	108.33	2.90	97%	103	15	85.44
Wastewater (adjusted pH 2.0)	102.32	16.41	83%	93	46	50.54
Wastewater (no adjusted pH)	102.32	63.79	37%	93	76	18.28

Thus, the results of rice husk adsorbent were only focused and were more discussion in this part. The experimental data for rice husk adsorbent was described accurately by the Langmuir model. The linear regression curve obtained from the Langmuir model gave a better fit than the Freundlich model. It was suggested that the mechanism of adsorption was monolayer and the surface area of the adsorbent was the major factor in the adsorption process. These results were similar to previous studies regarding the use of agricultural waste as adsorbent for removal of direct blue 199 [33], reactive orange dye 16 [35], direct blue 86 [36], direct yellow 12 [37], direct red 23 and

direct red 80 [38] from solution by following the Langmuir isotherm. These results also indicated that the best adsorbent was rice husk ($R^2 = 0.9946$), which was fitted to the Langmuir equation isotherm with a chemisorption mechanism involving the adsorption. The value of R_L (0.3131) was obtained in the range of 0–1, which suggested that the adsorption process was favorable. It was also confirmed that the surface of the rice husk was a significant parameter for dye removal efficiency as the smaller particles provided more available sites for dye adsorption. Due to the specific surface area of rice husk adsorbent was the larger and its pore size was smaller than that of water hyacinth.

Therefore, the surface of rice husk was an important factor for efficiency of dye removal because an increase of surface area with decreasing in pore diameter of rice husk can provide a favorable adsorption process with more available site for dye adsorption than the larger particles. In the process of dye removal, the surface area is critical because when adsorption takes place, the molecules become attached to the active regions of the sorbent surface before diffusing into the pores to provide coloration. The extent to the pore volume influences adsorption depends upon the level of steric hindrance, which is related to the dye molecule size. Thus, it can penetrate the structure of the pores. However, adsorption is increased with the greater surface area and the greater sorbent pore volume [39].

3.4 Comparison of the efficiencies of dye removal by rice husk between synthetic wastewater and textile dyeing industrial wastewater

The results of efficiencies of dye removal by rice husk between synthetic wastewater (pH 2.0) and textile dyeing industrial wastewater (adjusted or no adjusted pH 2.0) are shown in Table 3. The initial dye concentration of synthetic wastewater was 108.33 mg/L (color intensity 103 IAU). After a period of time, the dye removal was 97% with 2 mg/g dye adsorbed of rice husk. The final concentration of synthetic wastewater was 2.90 mg/L (color intensity 15 IAU). As, the initial dye concentration of textile dyeing

industrial wastewater was 102.32 mg/L (color intensity 93 IAU). After a period of time, the dye removal at the optimal condition (adjusted pH 2.0) was 83%, the amount of dye adsorbed was 1.7181 mg/g of rice husk, and the final dye concentration of textile dyeing industrial wastewater was reduced to 16.4118 mg/L (color intensity 46 IAU). Meanwhile, the acidic conditions (pH 2.0) affected adversely to the ecosystem and environment and may not be appropriate for use in wastewater treatment plant. After a period of time was done, the percentage of dye removal, the amount of dye adsorbed and final concentration at the normal condition (no adjustment to pH) were 37%, 0.7706 mg/g, and 63.7882 mg/L (color intensity 76 IAU), respectively.

After the textile dyeing industrial wastewater was adsorbed by rice husk, the quality of wastewater was showed the better values. The physical and chemical characteristics of wastewater were BOD 48 mg/L, COD 292 mg/L, TSS 85 mg/L, and TDS 1,430 mg/L. These parameters were followed the standards of industrial effluent quality of the Department of Industrial Works, Thailand [40]. Consequently, application of rice husk could be reduction of TSS, TDS, BOD and COD values from wastewater and was effective for dye removal from textile dyeing industrial wastewater. Regarding an evaluation of approximate capital cost of using rice husk for dye removal, it was based on only the saturation capacity (q_m) of the adsorbent without other cost factors, for example cost

for regeneration or disposal cost, in the evaluation. Rice husk was also a ready-to-use material with low-cost adsorbent for dye removal. In case of the adsorption system cost was estimated as the relative

cost for 1 kg of adsorbent, the comparative assessment of cost and adsorption (saturation) capacity for dye removal with other adsorbents was showed in Table 4.

Table 4 Comparative assessment of cost and adsorption (saturation) capacity for dye removal with other adsorbents

Adsorbents	Adsorption capacity	Price/kg of adsorbent	Reference
	(mg/g)	(Bath)	
Activated carbon (powder)	222.22	150	[41]
Bentonite	151-175	43	[42]
Carbonaceous materials	75.1	17.28	[43, 44]
Fly ash (bagasse)	6.46	7	[44, 45]
Rice husk	0.478	5	This study

4. Conclusion

Waste materials of rice husk (RH) and water hyacinth (WH) as natural adsorbents could be applied effectively for dye removal from textile dyeing industrial wastewater. Both adsorbents were optimal recorded the maximum uptake of dye at initial pH 2.0. For quantitative of dye removal, the minimum dosages were found out at 50 g/L (RH) and 10 g/L (WH). A contact time period of 360 min for both adsorbents was considered to be a suitable time interval to attain adsorption equilibrium. Moreover, their kinetic adsorptions were fitted to the pseudo second-order model. The Langmuir (0.9946) and the Freundlich equation isotherms (0.9445) of RH adsorbent were higher than that of WH adsorbent (i.e. 0.8043 and 0.8109). Thus, the best adsorbent was rice husk

($R^2=0.9946$), which was also followed the Langmuir equation isotherm. The efficiencies of dye removal from textile dyeing industrial wastewater by RH adsorbent under the optimal condition were at 83%. The textile dyeing industrial wastewater after using adsorption of RH were reduction values of BOD (from 95 to 48 mg/L), COD (from 445 to 292 mg/L), TSS (from 178 to 85 mg/L), and TDS (from 2,243 to 1,430 mg/L).

5. Acknowledgements

The authors would like to thank the National Research Council of Thailand for a fund. We also express our greatest thanks to Associate Professor Dr. Benjaphorn Prapagdee and Associate Professor Dr. Parkorn Suwanich of Mahidol University, Thailand for their helpful suggestions.

6. References

- [1] Department of Industrial Work, “*Guidelines for the effluent of the textile factory*”, 2013. (in Thai)
- [2] K. Santhy and P. Selcapathy, “Removal of reactive dyes from wastewater by adsorption on coir pith activated carbon”, *Journal of Bioresource Technology* 97(11), 2006, pp. 1329-1336.
- [3] K. Harazono and K. Nakamura, “Decolorization of mixtures of different reactive textile dyes by the white-rot basidiomycete *Phanerochate sordida* and inhibitory effect of polyvinyl alcohol”, *Chemosphere* 59, 2005, pp. 63-68.
- [4] F. Derbyshire, M. Jagtoyen, R. Andrews, A. Rao, I. Martin-Gullon and E. Grulke, “Carbon materials in environmental applications”, In: Radovic, L.R. (Ed.) *Chemistry and Physics of Carbon* 27, 2001, pp. 1–66.
- [5] O.H. Duygu and L.J. Van, “Removal of Color from Fruit Candy Waste by Activated Carbon Adsorption”, *Journal of Food Engineering* 101, 2010, pp. 106-112.
- [6] M. Soni, A.K. Sharma, J.K. Srivastava and J.S. Yadav “Adsorptive removal of methylene blue dye from an aqueous solution using water hyacinth root powder as a low cost adsorbent”, *Journal of Chemical Sciences and Applications* 3(3), 2012, pp. 338-345.
- [7] V. Vadivelan and K.V. Kumar, “Equilibrium, kinetics, mechanism, and process design for the sorption of methylene blue onto rice husk”, *Journal of Colloid and Interface Science* 286, 2005, pp. 90-100.
- [8] A. Zampieri, G. Mabande, T. Selvam, W. Schwieger, A. Rudolph, R. Hermann, H. Sieber and P. Greil, “Biotemplating of *Luffa cylindrica* sponges to self-supporting hierarchical zeolite macrostructures for bio-inspired structured catalytic reactors”, *Journal of Materials Science and Engineering C6*, 2006, pp. 130-135.
- [9] J. Carpenter, S. Sharma, A. Sharma and S. Verma, “Adsorption of Dye by Using the Solid Waste from Leather Industry as an Adsorbent”, *Journal of Engineering Science Invention*, 2013, pp. 64-69.
- [10] M. Arami, N.Y. Limaee, N.M. Mahmoodi and N.S. Tabrizi, “Removal of dye from colored textile wastewater by orange peel adsorbent: Equilibrium and kinetic studies”, *Journal of Colloid and Interface Science* 288, 2005, pp. 371-376.
- [11] American Public Health Association (APHA), “*Standard Methods for the Examination of Water and Wastewater* (22nd Eds.)”, Washington D.C., 2012.
- [12] S. Samantaroy, A.K. Mohanty and A. Misra, “Removal of hexavalent chromium by kendu fruit gum dust”, *Journal of Applied Polymer Science* 66, 1997, pp. 1485–1494.

- [13] Z. Bouberka, S. Kacha, M. Kameche, S. Elmaleh and Z. Derriche, “Sorption study of an acid dye from an aqueous solution using modified clays”, *Journal of Hazardous Materials B119*, 2005, pp. 117-124.
- [14] S. Lagergren, “Zur theorie der sogenannten adsorption gel oster stoffe”, *Kungliga Svenska Vetenskapsakademiens, Handlingar* 24, 1998, pp. 1-13
- [15] L. Lin, H.R. Zhai, Z.Y. Xiao, Y. Song and X.W. Song, “Dye adsorption of mesoporous activated carbons produced from NaOH-pretreated rice husks”, *Bioresource Technology* 136, 2013, pp. 437-443.
- [16] Y.S. Ho and G. McKay “Kinetic models for the sorption of dye from aqueous solution by wood”, *Process Safety and Environmental Protection* 76(2), 1998, pp. 183-191.
- [17] D.F. Samuel and M.A. Osman, “*Adsorption process for water treatment*”, Boston: Butterworths, 1987.
- [18] C. John, “*Water treatment principle and design*”, Hoboken, New Jersey: John Wiley & Sons, 2005.
- [19] D. Chatsirivej, “*Adsorption processes*”, Chulalongkorn University Printing House, 2010. (in Thai)
- [20] N.M. Mohmoodi, J. Abdi and F. Najafi, “Synthesis of urethane polycarboxylate as a novel adsorbent and its binary system dye removal ability from aqueous solution” *Fibers and Polymers* 15, 2014, pp. 446-456.
- [21] S.S. Jahagirdar, S. Shrihari and B. Manu, “Reuse of incinerated textile mill sludge as adsorbent for dye removal”, *Journal of Civil Engineering* 19, 2015, pp. 1982-1986.
- [22] Md. M.R. Khan, M.Z.B. Mukhlis, M.S.I. Mazumder, K. Ferdous, D.M.R. Prasad and Z. Hassan, “Uptake of indosal dark-blue GL dye from aqueous solution by water hyacinth root powder: adsorption and desorption study”, *International Journal of Environmental Science and Technology* 11, 2014, pp. 1027-1034.
- [23] P.K. Papeqowda and A.A. Syed, “Isotherm, kinetic and thermodynamic studies on the removal of methylene blue dye from aqueous solution using saw palmetto spent”, *International Journal of Environmental Research* 11, 2017, pp. 91-99.
- [24] K.S. Bharathi and S.T. Remesh, “Removal of dyes using agricultural waste as low-cost adsorbents: a review” *Applied Water Science* 3(4), 2013, pp. 773-790.
- [25] E.C. Lima, B. Royer, J.C.P. Vaghetti, N.M. Simon, B.M. Cunha, F.A. Pavan, E.V. Benvenuto, R. Cataluna-Vesess and C. Airoldi, “Application of Brazilian pine-fruit shell as a biosorbent to removal of reactive red 194 textile dye from aqueous solution Kinetics and equilibrium study”, *Journal of Hazardous Materials* 155, 2008, pp. 536–550.

- [26] J.L. Brasil, R.R. Ev, C.D. Milcharek, L.C. Martins, F.A. Pavan, A.A.D. Santos, S.L.P. Dias, J. Dupont, C.P.Z. Norena and E.C. Lima, "Statistical design of experiments as a tool for optimizing the batch conditions to Cr (VI) biosorption on Araucaria angustifolia wastes", Journal of Hazardous Materials 133(1-3), 2006, pp. 143–153.
- [27] F.D. Ardejani, KH. Badii, N.Y. Limaee, S.Z. Shafaei and A.R. Mirhabibi, "Adsorption of Direct Red 80 dye from aqueous solution onto almond shells: Effect of pH, initial concentration and shell type", Journal of Hazardous Materials 151(2-3), 2008, pp. 730-737.
- [28] K.V. Kumar and K. Porkodi, "Mass transfer, kinetics and equilibrium studies for the biosorption of methylene blue using Paspalum notatum", Journal of Hazardous Materials 146, 2007, pp. 214-226.
- [29] Y. Chen, S.R. Zhai, N. Liu, Y. Song, Q.D. An and X.W. Song, "Dye removal of activated carbons prepared from NaOH-pretreated rice husks by low-temperature solution-processed carbonization and H₃PO₄ activation", Bioresource Technology 144, 2013, pp. 401-409.
- [30] Y. Safa and H.N. Bhatti, "Kinetic and thermodynamic modeling for the removal of Direct Red-31 and Direct Orange-26 dyes from aqueous solutions by rice husk", Desalination. 272, 2011, pp. 313-322.
- [31] T. Akar, B. Anilan, A. Gorgulu and S.T. Akar, "Assessment of cationic dye biosorption characteristics of untreated and non-conventional biomass: *Pyracantha coccinea berries*", Journal of Hazardous Materials 168, 2009, pp. 1302-1309.
- [32] Y.S. Ho and G. McKay, "The kinetics of sorption of divalent metal ions onto sphagnum moss peat", Water Research 34 (3), 2000, pp. 735-742.
- [33] S. Saroj, S.V. Sigh and D. Mohan, "Removal of Colour (Direct Blue 199) from Carpet Industry Wastewater Using Different Biosorbents (Maize Cob, Citrus Peel and Rice Husk)", Arabian Journal for Science and Engineering 40, 2015, pp. 1553-1564.
- [34] W.C. Wanyonyi, J.M. Onyari and P.M. Shiundu, "Adsorption of methylene blue dye from aqueous solutions using Eichhornia crassipes", Bulletin of Environmental Contamination and Toxicology 91(3), 2013, pp. 362-366.
- [35] D. Suteu, T. Malutan and D. Bilba, "Agricultural waste corn cob as a sorbent for removing reactive dye orange 16: equilibrium and kinetic study", Journal of Cellulose Chemistry Technology 45, 2011, pp. 413-420.
- [36] A.El. Nemr, O. Abdelwahab, A. El-Sikaily and A. Khaled, "Removal of direct blue-86 from aqueous solution by new activated carbon developed from orange peel", Journal of Hazardous Materials 161(1), 2009, pp. 102-110.

- [37] A. Khaled, A.El. Nemr, A. El-Sikaily and O. Abdelwahab, “Treatment of artificial textile dye effluent containing direct yellow 12 by orange peel carbon”, *Desalination*. 238, 2009, pp. 210-232.
- [38] L.B.L. Lim, N. Priyantha, C.M Chan, D. Matassan, H.I. HeiIng Chieng and M.R.R. Kooh, “Adsorption behavior of methyl violet 2B using duckweed: equilibrium and kinetics studies”, *Arabian Journal for Science and Engineering* 39, 2014, pp. 6757-6765.
- [39] S. Chandrasekhar and P.N. Pramada, “Rice husk ash as an adsorbent for methylene blue- effect of ashing temperature”, *Adsorption*. 2006; 12: 27-43.
- [40] G. Sripongpun, “*Water Pollution* (4th Eds.)”, Silpakorn University Printing House, 2006. (in Thai)
- [41] R. Malik, D.S. Ramteke and S.R. Wate, “Adsorption of malachite green on ground nut shell waste based powdered activated carbon”, *Journal of Waste Management* 27, 2007 pp. 1129-1138.
- [42] S. Hong, C. Wen, J. He, F. Gan and Y.S Ho, “Adsorption thermodynamics of methylene blue onto bentonite”, *Journal of Hazardous Materials* 167, 2009, pp. 630-633.
- [43] M.H. Baek, C.O. Ijagbemi, O.S. Jin and D.S. Kim, “Removal of Melachite Green from aqueous solution using degreased coffee bean”, *Journal of Hazardous Materials* 176, 2010, pp. 820-828.
- [44] V.K. Gupta and Suhas, “Application of low-cost adsorbents for dye removal– A review”, *Journal of Environmental Management* 90, 2009 pp. 2313-2342.
- [45] V.K. Gupta, D. Mohan, S. Sharma and M. Sharma, “Removal of basic dyes (Rhodamine B and methylene blue) from aqueous solutions using baggase fly ash”, *Journal of Separation Science and Technology* 35(13), 2000 pp. 2097-2113.